WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :		(11) International Publication Number: WC	98/52018
G01N 15/14	A1	(43) International Publication Date: 19 November 1	998 (19.11.98)

(21) International Application Number: PCT/US98/09689

(22) International Filing Date: 12 May 1998 (12.05.98)

(30) Priority Data: 60/046,470 14 May 1997 (14.05.97) US 09/072,502 4 May 1998 (04.05.98) US

(63) Related by Continuation (CON) or Continuation-in-Part
(CIP) to Earlier Application
US 60/046,470 (CON)

Filed on 14 May 1997 (14.05.97)

(71) Applicant (for all designated States except US): APPLIED IMAGING CORPORATION [US/US]; 2340A Walsh Avenue, Santa Clara, CA 95051 (US).

(72) Inventor; and
(75) Inventor/Applicant (for US only): RAVKIN, Ilya [US/US];
945 Colorado Avenue, Palo Alto, CA 94303 (US).

(74) Agents: SLONE, David, N. et al.; Townsend and Townsend and Crew LLP, 8th floor, Two Embarcadero Center, San Francisco, CA 94111-3834 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: IDENTIFICATION OF OBJECTS BY MEANS OF MULTIPLE IMAGING

(57) Abstract

Detection of fetal nucleated red blood cells (NR-BCs) is achieved by employing a combination of brightfield and fluorescence images of nuclear and cytoplasmic markers. The brightfield and fluorescence images are all obtained with a single multi-bandpass dichroic mirror. The objects in the sample are stained with a fluorescent dve that selectively stains nuclei and a dye that selectively stains fetal hemoglubin in the cytoplasm of fetal RBCs. UV excitation provides fluorescent emissions from the stained cell nuclei and visible illumination provides brightfield transmission of light that is absorbed by the stained cytoplasm. The images are processed to determine regions where the fluorescent emissions by cell nuclei in response to the UV excitation and the absorption by fetal hemoglobin of the brightfield illumination overlap or are in close proximity. The brightfield and fluorescence images may be sequentially acquired or derived from a single image where the UV excitation and visible illumination occur simultaneously.

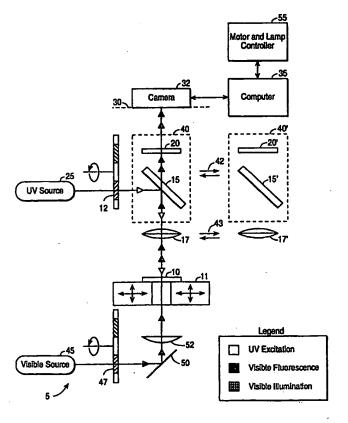

á١

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

							•
AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Моласо	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar -	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	ΚZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		•
EE	Estonia	LR	Liberia	SG	Singapore		

WO 98/52018 PCT/US98/09689

IDENTIFICATION OF OBJECTS BY MEANS OF MULTIPLE IMAGING

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority from U.S. Provisional Application No. 60/046,470, filed 05/14/97, of Ilya Ravkin for "IDENTIFICATION OF TARGET FEATURES SUCH AS NUCLEATED RED BLOOD CELLS USING FLUORESCENCE AND TRANSMISSION SCANNING," the entire disclosure of which, including all attached documents and appendices, is incorporated by reference for all purposes.

5

10

15

20

25

30

35

BACKGROUND OF THE INVENTION

The present invention relates generally to optical recognition systems, and more particularly to identifying fetal nucleated erythrocytes from maternal cells in a blood sample of a pregnant woman.

It is known to perform image processing on images of biological samples where different dyes are caused to reside on different portions of the sample, each dye residing on a particular feature that characterizes an object of interest. The sample is then illuminated and imaged in a manner that the different features of interest can be distinguished from each other and from the background. This typically entails acquiring separate images using the appropriate light sources, filters, and optical setup so that each image's particular type of feature appears recognizably.

SUMMARY OF THE INVENTION

The present invention provides robust and efficient techniques for analyzing samples to find objects of interest that are interspersed with other objects.

In short, a sample is prepared to impart optical properties to objects so that objects of interest, when imaged on an imaging medium under a plurality of different illumination schemes, exhibit a combination of features that is different from combinations of features exhibited by other objects. This combination is therefore referred to as the unique combination. The objects of interest are found by analyzing images arising from the respective illumination schemes to determine instances where the unique combination of features from the different images meets a predetermined proximity constraint (e.g., overlap or near-overlap).

The illumination schemes and the optical properties are such that the sample is imaged on the imaging medium under the plurality of

10

15

20

25

30

35

40

45

different illumination schemes without having to move any optical elements into or out of the path between the sample and the imaging medium. Thus, images corresponding to the illumination schemes are largely immune to registration problems, thereby making the overlap of the unique combination of features a reliable indication of an object of interest.

The images can be separately acquired images, each taken with a respective one of the illumination schemes, or can be derived from a lesser number of images, each taken with a combination of the illumination schemes in effect simultaneously.

In a specific example: the objects of interest are fetal nucleated red blood cells (NRBCs) and the other objects include non-nucleated red blood cells (RBCs) and nucleated white blood cells (WBCs); the objects in the sample are stained with a fluorescent dye that selectively stains nuclei and a dye that selectively stains fetal hemoglobin in the cytoplasm of fetal RBCs; there are two different illumination schemes, namely UV excitation to provide fluorescent emissions from the stained cell nuclei and brightfield transmission of light that is absorbed by the stained cytoplasm; and the unique combination of features is the fluorescent emissions by cell nuclei in response to the UV excitation and the absorption by fetal hemoglobin of the brightfield illumination.

In specific embodiments, the image that is expected to contain the fewest features is analyzed first to determine candidate regions of interest for subsequent processing. This is accomplished by finding regions in the image that contain the feature that objects of interest (as well as other objects) exhibit in the image, and then examining the corresponding regions in the images to determine whether or not the images all contain instances of the respective features in sufficient proximity to denote the presence of an object of interest.

In specific embodiments, the images (or preferably candidate regions thereof) are processed to generate respective contrast masks, which are combined and further processed to provide the locations of objects of interest in the images. The combination can include a logical AND operation between the masks, possibly themselves morphologically dilated to form a seed image. The further processing can include reconstructing the seed within the masks to provide the desired regions representing the features of interest where they denote the presence of an object of interest.

A further understanding of the nature and advantages of the present invention may be realized by reference to the remaining portions of the specification and the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an optical schematic of apparatus according to an embodiment of the invention;

FIG. 2 is a block diagram of a computer system according to an embodiment of the invention;

FIG. 3 is a flowchart showing the sequence of operations performed in specific embodiments of the invention;

FIG. 4A is a flowchart showing image generation steps using simultaneous illumination of the sample;

FIG. 4B is a combined light intensity profile through a fetal nucleated red blood cell (NRBC);

FIG. 5 is a flowchart showing steps for determining regions of interest;

FIG. 6 is a flowchart showing steps for constructing two separate masks that represent nuclear contrast and cytoplasmic contrast; and

FIG. 7 shows a representative set of data that is generated and stored for each NRBC.

DESCRIPTION OF SPECIFIC EMBODIMENTS

1. <u>Imaging Overview</u>

20

25

30

35

40

45

10

15

The present invention utilizes fluorescence imaging in connection with brightfield (transmission) imaging to locate certain objects of interest in a sample. In the particular application, the samples are blood smears from pregnant women (9-16 weeks gestation) enriched for nucleated red blood cells (NRBCs), which are the objects of interest.

In the particular implementation, the invention is carried out to identify such objects for further analysis such as FISH. FISH stands for Fluorescence In-Situ Hybridization. A FISH sample is prepared by using a probe that binds to a particular DNA sequence in the chromosomes in the sample, and the probe is labeled with a fluorescent dye. M-FISH refers to using multiple probes, each of which binds to a different DNA sequence in the chromosomes in the sample, where each probe is labeled with a different dye or combination of two or more dyes. For that reason, the apparatus described below has additional functionality beyond what is needed for carrying out the invention.

A given fluorescent dye is characterized by an excitation (absorption) spectrum and an emission spectrum. The excitation and emission spectra are also sometimes referred to as the excitation and emission bands. Accordingly when the dye is irradiated with light at a wavelength within the excitation band, the dye fluoresces, emitting light at wavelengths in the emission band. Thus when the sample is irradiated with excitation radiation in a frequency band that excites a given dye, portions of the sample to which the probe labeled with the given dye is attached fluoresce. If the light emanating from the sample is filtered to reject light outside the given dye's emission band, and then imaged, the

WO 98/52018 PCT/US98/09689

image nominally shows only those portions of the sample that bind the probe labeled with the given dye.

2. The Sample

5

Although the details of the sample preparation are not part of the invention, the preparation will be described briefly to provide context for the description of the specific embodiments. The present invention is directed to the second phase of a three-phase evaluation that includes enrichment of fetal NRBCs from maternal blood, positive identification of fetal NRBCs, and genetic analysis of fetal NRBCs. As mentioned above, in specific implementations, the apparatus is configured so as to be suitable to play a role in both the second phase (identification) and third phases (genetic analysis).

15

20

25

30

35

10

The enrichment procedure starts with 20mL of EDTA anticoagulated whole blood from pregnant women at 9 to 16 weeks post conception. It is calculated from PCR studies [Bianchi97] that this amount of blood contains approximately from 20 to 100 fetal cells. The goal is to achieve a 10,000-fold reduction of maternal blood cells without significant loss of the target NBRCs. This will permit the deposition of the fetal NRBC on a slide. The first step of enrichment is the separation of the blood sample into density fractions by centrifugation of the whole blood in a specially designed plastic tube [Saunders95]. The NRBCs are harvested from the interface layer between white blood cells (WBCs) and red blood cells (RBCs). The second step is a selective lysis of the remaining maternal RBCs. The third and final step separates NRBCs from the remaining WBCs in a three-layer density gradient formed of a silica colloid Percoll (Pharmacia, Uppsala, Sweden) suspended in gelatin under hypertonic conditions. After centrifugation, the NRBCs are harvested from the bottom of the gradient and deposited on a slide.

The resulting slide contains NRBCs, RBCs, and WBCs, all of them of possible fetal or maternal origin. In embodiments of the invention, a set of features that identify the fetal NRBCs are created to distinguish them from other types of cells. This is done by creating one type of contrast in cells containing fetal hemoglobin, and another type of contrast in cells having a nucleus. The slide is first reacted with the primary antibody, namely mouse anti fetal hemoglobin (HbF), then with the secondary antibody, namely goat anti mouse conjugated to biotin, and lastly streptavidin conjugated with alkaline phosphatase is added followed by Vector Blue substrate. The result is a blue precipitate on the cytoplasm of cells that contain fetal hemoglobin. A DNA intercalating agent (DAPI) gives all nuclei a fluorescent blue stain; the presence of

40

45

Custom slides were developed for use with the invention.

These slides have four painted squares in the corners with crosses laser etched in each square. Prior to scanning, coordinates of the reference

both these contrasts determines a fetal NRBC.

points are recorded in the scan data file. At any time later, the reference points can be easily found and centered in the camera field of view. The offset is used for accurate relocation to all other objects in the scan file.

5

10

15

20

25 .

30

35

40

45

3. Optical System

system 5 for carrying out combined fluorescence (preferably epiilluminated) and brightfield (transmission) imaging of a sample 10
according to the present invention. The sample is shown mounted to a
stage 11, which provides three-dimensional rectilinear motion. As will be
described below, the invention can be implemented with sequential
acquisition of brightfield and fluorescent images, or with simultaneous
acquisition of brightfield and fluorescent image components, with
subsequent separation into separate images. The optical system includes
portions for each of the two types of images, although a significant
portion of the optics are shared.

The portion of the optical train for epi-illuminated fluorescence imaging includes an excitation filter 12 (shown as one of several such filters on a filter wheel), a polychroic mirror 15, a microscope objective 17 (say 10-100x), and an emission filter 20. The present invention can be implemented with a single excitation filter, a dichroic mirror, and an emission filter with a single passband. However, it is preferred to perform additional fluorescent measurements (FISH), and therefore it is preferred to use a multiband emission filter and a polychroic mirror so that multiple fluorescent images can be acquired without changing the mirror or emission filter.

Excitation radiation from an ultraviolet (UV) source 25 passes through excitation filter 12, is largely reflected by mirror 15 and proceeds through the microscope objective 17 to sample 10. The excitation light traveling toward the sample is shown schematically by hollow arrowheads. Fluorescent radiation emitted from sample 10 passes back through objective 17, through mirror 15, and through emission filter 20 to form an image in an image plane 30. The fluorescent light traveling away from the sample is shown schematically by solid black arrowheads. The image is digitized by a CCD video camera 32 and the digitized image is sent to a computer 35 for subsequent processing. Computer 35 is also used to control various components in the system, as will be described below.

Polychroic mirror 15 and emission filter 20 are typically rigidly mounted to a supporting structure 40 (shown in phantom); the assembly is often referred to as a cube, with multiple cubes being movable into and out of the optical path. Oppositely directed arrows 42 represent a suitable mechanism such as a rotatable turret or a detented slide mechanism. The multiple excitation filters are typically deployed on a rotatable filter wheel (as shown). In a typical microscope, objective

15

20

25

30

35

40

45

lens 17 will be one of several mounted on a turret or like structure. This is shown schematically by oppositely directed arrows 43.

The portion of the optical train for the brightfield imaging includes a visible light source 45, a passband filter 47 (shown as one of several such filters on a filter wheel), a mirror 50, and a condenser 52. Illumination radiation from source 45 passes through passband filter 47, is reflected by a mirror 50 to condenser 52. The radiation passing through the condenser illuminates sample 10, and proceeds through microscope objective 17. The illumination radiation is in a wavelength range that passes through polychroic mirror 15 and emission filter 20. The visible illumination light is shown schematically by hatched arrowheads.

The system also includes a series of motor and lamp controllers, shown as a single controller block 55 interfaced to computer 35. Controller 55 controls various of the elements shown in the optical schematic of FIG. 1. This includes controlling motors for microscope focus, the filter wheels for excitation filter 12 and transmission filter 47, sample stage 11, cube turret 42, and objective turret 43. Controller 100 also controls UV light source 25 and visible light source 45. It should be understood, however, that the invention does not require that all the controllable elements be under computer control, although it is preferred to have the controls mentioned. The particular techniques for interfacing a computer to external instruments are known to those skilled in the art, and since they are not, per se, part of the invention, they will not be described further.

In specific implementations, the microscope is an Olympus BX60 microscope (Olympus America, Inc., Melville, NY), and includes
transmission and fluorescence capabilities, a trinocular head, and 10x,
20x, and 40x objectives. Stage 11 can be a single or a multi-slide
scanning stage (Maerzhauser Co., Upper Saddle River, NJ), and is mounted
on the microscope with a 7-position transmission filter wheel, a 12position fluorescence filter wheel, and a focus drive (TOFRA, Palo Alto,
CA). These devices are driven by stepping motors and are controlled by
microstepping motor controllers (Intelligent Motion Systems, Marlborough,
CT). Video camera 32 has light integration capability (COHU 4910, Cohu,
Inc., San Diego, CA), and is coupled to a frame grabber board, which
includes a 10-bit ADC and frame averaging. UV source 25 is typically a
mercury arc lamp while visible light source 47 is typically a halogen
lamp.

As will be described in greater detail below, the optical configuration of FIG. 1 is used for the sequential or simultaneous detection of DAPI fluorescence and Vector Blue absorption, and subsequently also for FISH imaging. An important advantage is the permanent presence of the polychroic mirror and emission filter for the detection of both absorption and fluorescence.

20

25

30

35

40

45

In the specific implementation, the epi-illumination starts with the mercury arc, traverses the DAPI excitation filter and is reflected down by the polychroic mirror; excites the blue fluorescence of the DAPI stained cells, the emitted light returns through the objective, and passes through both the mirror and the emission filter to the camera. The trans-illumination starts with the halogen lamp, passes through a long-pass (red) filter, is absorbed by the cells stained with Vector Blue, and passes through the objective, the polychroic mirror and emission filter to the camera. Depending on the DNA probes, a Chroma 83000 triple band filter set (Chroma Technology Corp., Brattleboro, VT) or a Vysis quad DAPI/Aqua/Green/Orange filter set (Vysis, Inc., Downers Grove, IL) is used. Transmission Kohler illumination and the spectral filter optimize contrast for the cytoplasmic color on the slide

15 4. Computer System

FIG. 2 is a simplified block diagram of computer 35. The computer is used to control all motion, perform image acquisition and processing, and user interface functions. In a specific implementation, computer 35 is a workstation running the Windows 95 operating system (MicroSoft Corporation, Redmond, WA). In accordance with known practice, the computer system includes a processor 60 that communicates with a number of peripheral devices via a bus subsystem 65. These peripheral devices typically include a memory subsystem 67, an input facility 70, a display subsystem 72, output devices such as a printer 73, and a file storage system 75.

In this context, the term "bus subsystem" is used generically so as to include any mechanism for letting the various components of the system communicate with each other as intended. With the exception of some of the input devices and the display, the other components need not be at the same physical location. Thus, for example, portions of the file storage system could be connected via various local-area or wide-area network media, including telephone lines. Similarly, the input devices and display need not be at the same location as the processor, although it is anticipated that the present invention will most often be implemented in the context of PCs and workstations.

Bus subsystem 65 is shown schematically as a single bus, but a typical system has a number of buses such as a local bus and one or more expansion buses (e.g., ADB, SCSI, ISA, EISA, MCA, NuBus, or PCI), as well as serial and parallel ports. Network connections are usually established through a device such as a network adapter on one of these expansion buses or a modem on a serial port. The computer system may be a desktop system or a portable system.

Memory subsystem 67 includes a number of memories including a main random access memory (RAM) 80 and a read only memory (ROM) 82 in which fixed instructions are stored. In the case of Macintosh-compatible personal computers the ROM would include portions of the operating system;

15

20

25

30

35

40

45

in the case of IBM-compatible personal computers, the ROM would include the BIOS (basic input/output system).

Input facility 70 typically includes a user input device such as a keyboard 90, and may further include a pointing device 92 and a scanner 93. The pointing device may be an indirect pointing device such as a mouse, trackball, touchpad, or graphics tablet, or a direct pointing device such as a touchscreen incorporated into the display. Other types of user input devices, such as voice recognition systems, are also possible. Camera 32 can be considered part of the input facility.

Display subsystem 72 typically includes a display controller 94 and a display device 95 coupled to the display controller. The display device may be a cathode ray tube (CRT), a flat-panel device such as a liquid crystal display (LCD), or a projection device. Display controller provides control signals to the display device and normally includes a display memory (not shown in the figure) for storing the pixels that appear on the display device. The display subsystem may also provide non-visual display such as audio output.

The file storage system provides persistent (non-volatile) storage for program and data files, and typically includes at least one hard disk drive 96 and at least one floppy disk drive 97 (with associated removable media). There may also be other devices such as a CD-ROM drive 98 and optical drives (all with their associate removable media). Additionally, the system may include drives of the type with removable media cartridges. The removable media cartridges may, for example be hard disk cartridges, such as those marketed by Syquest, Iomega, and others, and flexible disk cartridges, such as those marketed by Iomega and others. As noted above, one or more of the drives may be located at a remote location, such as in a server on a local area network or at a site on the Internet's World Wide Web.

5. Processing Overview

FIG. 3 is a flowchart showing, at a high level, the sequence of operations performed in specific embodiments of the invention. As mentioned above, the invention is directed toward finding specific objects of interest in an sample. In the specific application, the objects of interest are fetal nucleated red blood cells (NRBCs) in a sample of maternal blood. Despite enrichment, the number of NRBCs is likely to be small compared to the number of non-nucleated red blood cells (RBCs) and nucleated white blood cells (WBCs).

The analysis begins at a step 120 of generating images with two different contrasts, one which shows regions of cytoplasm and one which shows nuclei. As mentioned above, these two contrasts arise from the absorption of transmitted visible (red) light by the (blue) dye that preferentially stains cytoplasm and the fluorescence from cell nuclei stained by the fluorescent dye DAPI. Further, as mentioned above, the two

10

15

20

25

images can be generated from separately acquired images resulting from sequential exposure of the sample to the two light sources, or can be generated from a single acquired image with the sample illuminated by both light sources simultaneously.

The images are generated for each of a plurality of fields on the slide. A field corresponds to the number of pixels on the CCD imaging array, typically 512x512, and there are typically hundreds or thousands of fields on the slide. This is accomplished by stepping sample stage 11 along both axes in the plane of the sample. Since the objects of interest are likely to occupy a relatively small fraction of the image field, it is preferred to perform a step 125 of quickly determining the portions of each field that are candidates for containing objects of interest. The subsequent processing steps in the method are recited as applying to the images, but it should be understood that the processing steps are typically only applied to the candidate regions of each field.

The individual images are processed separately at a step 130 to provide derivative images (masks) that can be correlated or combined at a step 135 to determine if an object of interest is present. The method has thus provided the locations of regions of the sample that are expected to contain objects of interest, making it possible to subject the objects to further analysis at a step 140. For example, in a subsequent analysis phase, the computer can control the stage to step the sample to these locations for manual inspection or further computerized processing. Thus, the result of the method is acceptance of an image as falling into a specific class of object, which is to be counted or to be examined in more detail for other contrasts, for example other colors of fluorescence for FISH analysis.

6. Image Acquisition

30

35

40

45

6.1 Sequential Image Acquisition

With sequential illumination of the sample, separate brightfield and fluorescence images are acquired on every field. For the absorption image, epi-illumination is blocked by an opaque segment of the excitation filter wheel, and visible light source 45 sends red light through the specimen to the camera. The absorption image shows objects positive for antibody staining. For the fluorescence image, transillumination is blocked, and the specimen is excited by light from UV source 25 going down through the objective. The fluorescence image shows all nuclei in the field. Fetal NRBCs are the objects having dark cytoplasms in the absorption image and bright nuclei in the fluorescence image.

6.2 Simultaneous Image Acquisition

FIG. 4A is a flowchart showing steps that can be performed to implement step 120 of FIG. 3 using simultaneous illumination of the

10 .

15

20

25

30

35

. 40

sample. The reference number 120' is used to denote this variant. Also shown is a highly stylized view of a small portion of the images at each step. These stylized views show three levels, black, white, and gray (as represented by cross-hatching). The objects are shown as having a circular shape.

At a step 145, a single image is acquired with the sample being transilluminated with red light and epi-illuminated with UV light at the same time. The intensities of both illumination systems light are balanced so that the empty background corresponds to a mid-level gray. Antibody-stained objects (cytoplasm) appear darker than the background and DAPI-stained objects (nuclei) appear brighter than the background. FIG. 4B is a combined light intensity profile through a fetal NRBC, and shows a significant drop in the cytoplasm, a rise in the nucleus, and another drop in the cytoplasm. In the schematic representation, the image shows an NRBC having cytoplasm (black in the figure) surrounding nucleus (white in the figure), and another nucleus without surrounding cytoplasm (white in the figure), all against a gray background (hatched in the figure).

Since the two images have been combined optically, they need to be separated digitally. As a first step to this end, a background gray level is determined at a step 150. In a specific implementation, the mode is used. Thus, the whole field is measured and a histogram of the number of pixels at each possible intensity level is constructed. The histogram is smoothed by adjacent averaging and the intensity corresponding to the top of the highest peak in the histogram is defined as the background value of light intensity. It would also be possible to use an average pixel value to specify the mid-level gray.

The combined images are separated at a step 155 into a below-the-background component, characterizing antibody absorption, and an above-the-background component, characterizing DAPI fluorescence. This is accomplished by comparing the background value determined in step 150 to the image on a pixel-by-pixel basis. This process is similar to a subtraction with saturation. This produces separate positive and negative-going images, which are essentially the two separate contrasts dissected from the single image.

This process can be viewed, with reference to FIG. 4B, as follows. For the absorption image, add a value corresponding to the difference between the maximum intensity value (255) and the background intensity value to all pixels. This has the effect of bringing the cytoplasm trough regions up from near-black to mid-gray, bringing the background up to a white or near-white level, and clipping the fluorescence peak at white. For the fluorescence image, subtract the background intensity value from all pixels, thereby bringing the fluorescence peak down to mid-gray, bringing the background down to a black or near-black level, and clipping the cytoplasm regions to black.

15

20

25

30

35

40

45

6.3 Relative Merits

Simultaneous illumination and image acquisition has the advantages of speed (because there is only one image to acquire and no filter switch for every field), and easy human recognition of NRBCs under the microscope. On the other hand, the disadvantage is a tighter requirement for cell fixation and sharpness of the DAPI image. There are conditions when the nuclear counterstain image is fuzzy and overlaps with the cytoplasm. In this case, simultaneous illumination cancels out both contrasts and the sequential method should be used. It should be realized, however, that the optical configuration is still advantageous for the sequential image acquisition since none of the elements in the optical path from the sample to the camera have to be moved, thus enhancing the ease of registration of the separate images for further processing. Naturally, where the two images were generated from a single combined image, they are automatically registered.

7. Image Processing and Correlation

7.1 Find Regions Potentially Containing Objects of Interest

As mentioned above, it is preferred to limit further refined processing to those regions of the image (or image field) that are considered likely to contain objects of interest. The NRBCs in the sample have a nucleus surrounded by cytoplasm containing fetal hemoglobin. In the images, this translates to an overlap or close proximity of an absorption feature and a fluorescence feature. In order to find corresponding regions in the respective images containing both features, it is necessary to scan one of the images for that image's distinctive feature. Once the scan of one image yields a set of candidate regions, it is only necessary to scan corresponding regions in the other image to determine whether they contain the other image's distinctive feature. This will be more efficient if the image that is expected to contain fewer features is scanned first. For example, if there are significantly more absorption features in the absorption image than fluorescent features in the fluorescence image, the fluorescence image should be scanned for features first. This order can be determined by the user, or set automatically as a function of the type of scan to be performed. The relative frequency of object types typically depends on the sample preparation (e.g., degree of enrichment).

FIG. 5 is a flowchart showing steps that can be performed to implement step 125 of FIG. 3. At this point in the overall process, separate absorption and fluorescence images have been provided, either having been acquired from separate optical images or having been electronically separated from a single optical image as shown in FIGS. 4A and 4B. The image that is expected to have fewer of its characteristic features will be referred to as the "first" image.

15

20

25

30

35

40

45

At a step 160, a background is determined for the first image based on all pixels in the first image. If the first image is the fluorescent image, the background value is set equal to the value of the darkest (lowest intensity value) pixel in the image. At a step 162, this background is subtracted from all the pixels in the image. At a step 165, all pixels are compared to a threshold for the image, to generate a binary image. A pixel is considered to be "ON" if it is above the threshold (fluorescent image) or below the threshold (absorption image). The threshold is relatively high, since at this stage it is only desired to see whether features are present without attempting to determine their precise outlines.

At a step 167, the image is analyzed to determine the locations of sufficiently large connected components (i.e., instances of a sufficient number of connected ON pixels) to signify the likely presence of an object. This is done using blob analysis according to techniques known to those skilled in the art. The regions surrounding the connected components in the first image define a set of candidate regions. These regions are significantly smaller than the 512x512 field, typically the smallest convenient square of pixels that can be defined, say 32x32 pixels or 64x64 pixels. At a step 170, coordinates for the set of candidate regions are stored for further analysis. As mentioned above, further processing is preferably restricted to these regions.

7.2 Mask Creation

FIG. 6 is a flowchart showing steps that can be performed to implement steps 130 and 135 of FIG. 3, namely separately processing the two images for a set of features which leads to the construction of two separate masks that represent nuclear contrast and cytoplasmic contrast. Input at this stage are the cytoplasm and nuclear images generated in step 120, with backgrounds having been subtracted at steps 162 and 172. As

noted above, the further processing is done only on the image regions identified in step 125.

At a step 180, the images are subjected to further background subtraction operations, but this time the background is determined on a region-by-region basis. At a step_182, the images are thresholded to create binary masks. For the cytoplasm image, pixels darker than the threshold are set to ON (white in the figure) and pixels lighter than the threshold are set to OFF (black in the figure). For the nuclear image, pixels lighter than the threshold are set to ON (white) and pixels darker than the threshold are set to OFF (black).

When viewing the grayscale image(s), the notion of whether the features in the image(s) overlap tends to be rather subjective. Once the images have been thresholded to generate binary images, the separation is directly quantifiable. Depending on the threshold used to create the binary images and the objects' geometries, features that appear subjectively to an observer to overlap in the grayscale images may be

15

20

25

30

35

40

45

disjoint, although in close proximity, in the binary images. It is then possible to define a maximum separation of the features (in the binary images) that will be still be considered to represent an overlap, and thus a candidate for the object of interest.

The specific feature of the cells of interest is the overlap or close proximity of antibody-positive and DAPI-positive areas. In order to find these overlaps or proximities, the binary masks are subjected at a step 185 to a first set of morphological image processing steps [Serra89]. In particular, the images are morphologically "opened" to eliminate small random signals which are not part of the identified localized feature. Opening is in effect a filtering process. The opened masks are then morphologically "dilated," which has the effect of expanding each remaining feature (region of ON pixels, shown as white in the figure) by a designated amount in all directions. Note that the dilation has the effect of shrinking holes (regions of OFF pixels surrounded by or intruding into regions of ON pixels.

The designated amount of expansion is determined by the morphological dilation operation. More specifically, the degree to which an edge of a region of ON pixels is expanded by dilation is determined by the size of what is referred to as a structuring element. Thus the size of the structuring element is selected in view of the amount by which features are allowed to be separated and still be considered to "overlap." This is a function of image magnification. It has been found that a structuring element that moves the boundaries by one pixel operates well at magnifications of 10x-20x. This means that two objects that just touch will, when dilated, have an overlap of two pixels.

An appropriate size for the structuring element can be empirically determined in a straightforward manner. For example, a representative sample of objects where the features appear to overlap in the grayscale images can be subjected to the thresholding, and the distribution of separations in the binary images determined. It has further been found that the results are not very sensitive to the size of the structuring element. For example, an expansion by two pixels would also likely be suitable.

At a step 190, the opened, dilated masks are combined or overlapped on the same field to discover true overlapping features. This is a logical AND operation that leaves only the rim of where the two masks overlap. This is also referred to as the intersection of the two masks. At a step 195, the intersection mask is morphologically dilated to produce a seed image. At a step 200, the seed image is used to finally identify the true cytoplasm and nuclear regions in the two images. This is done by reconstructing the seed within the cytoplasm and nuclear contrast images that were input to step 185. As can be seen in the figure, only the nucleus that had the surrounding cytoplasm appears in the final mask.

10

15

20

8. Workflow and Performance

The workflow for analysis of slides consists of three major steps: scan, review, and probe acquisition (FISH). The first step starts with a slide and produces a data file, which contains images and measurements of detected objects. In the second step, the operator reviews results of the scan, classifies and annotates the cells, and selects cells of interest for probe acquisition. The review is done primarily from the screen images, but the slide is available for immediate relocation and inspection under the microscope. Finally, probe images of the selected cells are acquired and the probe spots are counted.

The main form of presenting information for review is in a data grid, which contains images, measured features, classification, and annotation. FIG. 7 shows a representative set of data that is generated and stored for each NRBC. Ratio of Axes is the ratio of the short main inertia axis to the long main inertia axis, normalized to the range [0-100]. Small values are typical for elongated shapes; large values are typical for objects that appear more nearly circular in the image.

Compactess is the ratio of the moment of inertia of a disk with the same area as the given shape to the moment of inertia of the shape. This ratio is normalized to the range [0-100]. Small values are typical for ring-like, star-like or irregular shapes, large values are typical for compact and round objects.

To set up a scan the user performs the following actions:

25

30

35

40

45

Defines the scan area to correspond to the actual smear location on the slide.

Selects a representative field, and adjusts the image digitization parameters for each of the filters used in scanning. (Sometimes the digitizer adjustment is done on calibration slides).

Runs the finding algorithm on the selected field and adjusts the parameters if needed.

Sets the position of the reference point to provide for accurate relocation in the future.

Gives a name to the scan, and starts the scan.

The scan can be interrupted at any time to look at the objects and readjust parameters before resuming the scan. After the scan is complete, the user returns for review.

The objects can be revisited any number of times and each time a group of several images can be acquired for each object (for example, original images from scanning, same filter images at higher magnification, and probe images). Each group of images may be shown differently (e.g., in monochrome, in color, or both). The review process is aided by two-dimensional distribution plots of any two of the measured features. Each

10

15

20

25

30

35

40

45

class in the distribution is shown in a different color and the display resembles that in flow cytometry. Switching of views among stored cell images, distribution of cells in the feature space, and microscope relocation is instantaneous.

Another useful facility is sorting by linear combination of the measured features, which presents cells for review in the order of most likely candidates first. The result of the review is a classification and selection of cells for probe acquisition. At this time, the finding algorithms are designed to look for objects of one class (defined by the algorithm and its parameters), and there is no further automatic classification in the feature space. Classification is done manually by the user.

Searching for one combination of features, namely the overlap of DAPI fluorescence and HbF antibody absorption, has proved to be robust, missing few cells (<3%). The false positives are the overlaps of RBCs, WBCs, and debris. To separate NRBCs from false positives, the following parameters are used: average and integrated intensity in nucleus and cytoplasm, and area and shape of the nucleus and of the union of nucleus and cytoplasm.

The speed for scanning a 4 $\rm cm^2$ (typical smear) is 1/2 hour (at magnification 10x). The average relocation error is 2 mm (4 mm maximum). The program finds 97.2% of the NRBCs found by a trained operator.

9. References

The following documents were referred to above and are hereby incorporated by reference in their entirety for all purposes:

[Bianchi97] D.W. Bianchi, J.M. Williams, L.M. Sullivan, F.W. Hanson, K.W. Klinger, A.P. Shuber, "PCR quantitation of fetal cells in maternal blood in normal and aneuploid pregnancies", Am. J. Hum. Genet. 61, pp. 822-829, 1997

[Saunders95] A.M. Saunders, M.A. Zarowitz, P.J. Baldwin, "Method for separating rare cells from a population of cells", US Patent 5,432,054, issued July 11, 1995

[Serra89] J. Serra, Image Analysis and Mathematical Morphology, Vol. 1. Academic Press, London, 1989

10. Conclusion

In conclusion, it can be seen that the present invention provides methods and apparatus for efficiently and reliably identifying objects of interest in an image. A system according to the invention provides, in particular implementations, automated finding of cells,

10

15

storage of cell images and their slide coordinates, with interactive review, classification, and selection by the operator. The invention is robust in the face of the high variation among specimens, and adapts to difference in staining intensity and probe brightness, type of cell deposition on slides (smear or cytospin), cell density, different kinds of samples, and prevalence of different cell types.

While the above is a complete description of specific embodiments of the invention, various modifications, alternative constructions, and equivalents may be used. For example, while it is preferred to have epi-illumination for the UV excitation, it is possible to use transillumination for the UV excitation. Similarly, while the specific embodiment is based around a standard microscope, it is possible to carry out the invention with a specially configured optical setup.

Therefore, the above description should not be taken as limiting the scope of the invention as defined by the claims.

3

images comprises:

WHAT IS CLAIMED IS:

1	1. A method of finding objects of interest that are
2	interspersed with other objects in a sample, the method comprising:
3	providing a sample where objects have optical properties so
4	that objects of interest, when imaged on an imaging medium under a
5	plurality of different illumination schemes, exhibit a combination or
6	features, referred to as the unique combination, that is different from
7	combinations of features exhibited by other objects;
8	subjecting the sample to the plurality of illumination
9	schemes:
LO	generating a corresponding plurality of images; and
11	analyzing the plurality of images to determine instances where
12	the unique combination of features from the different images meets a
13	predetermined proximity constraint;
14	the sample being imaged on the imaging medium under the
15	plurality of different illumination schemes without moving any optical
16	elements into or out of the path between the sample and the imaging
17	medium.
1	2. The method of claim 1 wherein the plurality of images are
2	acquired separately with only a respective one of the plurality of
3	illumination schemes being in effect at a given time.
	· · · · · · · · · · · · · · · · · · ·
1	3. The method of claim 1 wherein the plurality of images are
2	derived from a lesser number of images, each of the lesser number of
3	images being taken with a combination of the illumination schemes in
4	effect simultaneously.
1	4. The method of claim 3 wherein first and second images are
2	derived from single image by:
3	configuring the illumination schemes corresponding to the
4	first and second images so that features corresponding to the first and
5	second illumination scheme are respectively at intensities above and below
6	a background level; and
7	generating the first image by reducing each pixel value in the
8	single image by a first amount so that background regions are generally at
è	minimum intensity; and
10	generating the second image by increasing each pixel value in
11	the single image by a second amount so that background regions are
12	generally at maximum intensity.
	and the plurality of
1	5. The method of claim 1 wherein analyzing the plurality of

examining a particular image of the plurality of images to

find a set of regions of the particular image that contains features; and

5	analyzing only the corresponding regions of the plurality of
5	images.
1	6. The method of claim 1 wherein analyzing the plurality of
2	images comprises:
3	applying a threshold to each image to create a respective
4	binary mask having ON pixels in areas representing the presence of
5	features in that image; morphologically processing each mask to expand regions of
6	
7	connected ON pixels; and logically ANDing the masks to define regions of overlap or
8	
9	near overlap of features present in the images.
1	7. The method of claim 1 wherein:
2	the objects of interest are fetal nucleated red blood cells
3	(NRBCs) and the other objects include non-nucleated red blood cells (RBCs)
4	and nucleated white blood cells (WBCs);
5	the objects in the sample are stained with a fluorescent dye
6	that selectively stains nuclei and a dye that selectively stains fetal
7	hemoglobin in the cytoplasm of fetal RBCs;
8	the plurality of different illumination schemes include UV
9	excitation to provide fluorescent emissions from the stained cell nuclei
10	and brightfield transmission of light that is absorbed by the stained
11	cytoplasm: and
12	the unique combination of features is the fluorescent
13	emissions by cell nuclei in response to the UV excitation and the
14	absorption by fetal hemoglobin of the brightfield illumination.
	s a second fatal muglested red blood cells in a
1	8. A method of detecting fetal nucleated red blood cells in a
2	sample region that contains additional objects, the method comprising:
3	providing a sample stained with a first dye that
4	preferentially stains fetal hemoglobin in the cytoplasm of fetal RBCs and
5	a second dye that preferentially stains cell nuclei; transilluminating the sample with first light in a wavelength
6	
7	range that is absorbed by the first dye; simultaneously illuminating the sample with second light that
8	causes the second dye to fluoresce and emit third light;
. 9	forming a single image of the first light passing through the
10	sample and the third light emitted by the sample; and
11	processing the single image to identify cells that have both
12	stained cytoplasm and nuclei.
13	Blained Cycopiasm and market.
1	9. The method of claim 8 wherein processing the single image
2	includes the substeps of:
3	determining a background level for the single image;

	generating a nuclear image by reducing pixel values in the
4 5 ·	single image by a first amount so that background regions are generally at
_	
6 7	arranging a cytoplasm image by increasing pixel values in the
, 8	single image by a second amount so that background regions are generally
9	internality:
.0	processing the cytoplasm image to produce a cytoplasm contlast
.1	the brains regions representing the presence of cytoplasm;
.2	processing the nuclear image to produce a nuclear contrast
.3	l design regions representing the presence of cell nuclei;
.s L4	ambining the cytoplasm contrast mask and the nuclear contrast
. . .5	of connected ON pixels in the cytopiasm contrast
16	the second conficiently close to regions of connected on pixels in the
17	nuclear contrast mask to signify the likely presence of fetal nucleated
18	red blood cells.
10	· · · · · · · · · · · · · · · · · · ·
. 1	10. The method of claim 9 wherein processing the nuclear and
2	1
3	examining one of the nuclear and cytoplasm images to lind a
4	set of regions of the one of the nuclear and cytoplasm images that
5	the features, and
6	processing only the corresponding regions of the other of the
7	nuclear and cytoplasm images.
•	
1	11. The method of claim 9 wherein the cytoplasm contrast mask
2	the nuclear contrast mask are combined by:
3	morphologically processing each mask to expand regions of
4	and on simple and
5	logically ANDing the masks, as morphologically processed, to
. 6	define regions of overlap or near overlap of features present in the
. 7	
1	12. The method of claim 8 wherein processing the single image
2	includes:
3	producing a cytoplasm contrast mask having regions
4	representing the presence of cytoplasm and a nuclear contrast mask having
5	regions representing the presence of cell nuclei;
6	morphologically processing each mask to expand regions of
7	connected ON pixels;
8	performing a logical AND between the cytoplasm contrast mask
9	and the nuclear contrast mask to produce an intersection image; and processing the intersection image and the cytoplasm contrast
10	processing the intersection image and the systems to be mask and the nuclear contrast mask to provide a mask that specifies areas
11	mask and the nuclear contrast mask to provide a mask contrast mask and a cell nucleus staine
12	
13	with the second dye.

11

1

2

at maximum intensity.

,	13. A method of detecting fetal nucleated red blood cells in
	a cample region that contains additional objects, the method comprising:
2 3	providing a sample stained with a first dye that
_	preferentially stains cytoplasm and a second dye that preferentially
4	
5	transilluminating the sample with first light in a wavelength
6	that is absorbed by the first dye;
7	forming a first image of the first light passing through the
8	and the second s
9	processing the first image to produce a cytoplasm contrast
.0	
.1	illuminating the sample with second light that causes the
.2	and the to fluoresce and emit third light;
L3	forming a second image of the third light emitted by the
14	
15	sample; processing the second image to produce a nuclear contrast mask
16	the presence of cell nuclei;
17	bining the cytoplasm contrast mask and the nuclear contrast
18	ontrast of connected ON pixels in the cytopiasm contrast
19 ·	the second secon
20	nuclear contrast mask to signify the likely presence of fetal nucleated
21	red blood cells
22	
1	14. The method of claim 13 wherein the first and second
2	images are acquired separately with only a respective one of the first
3	light and second light illuminating the sample at a given time.
3	
1	15. The method of claim 13 wherein the first and second
2	images are derived from a single image taken with the first light and
3	second light illuminating the sample simultaneously.
,	
1	16. The method of claim 15 wherein the first and second
2	denived from the single image by:
3	configuring the illumination of the first and second light so
4	ther features corresponding to fluorescence and absorption are
5	marroctively at intensities above and below a background level, and
6	reporting the first image by reducing pixel values in the
7	single image by a first amount so that background regions are generally a
8	-inimum intensity, and
9	reporting the second image by increasing pixel values in the
10	single image by a second amount so that background regions are generally

17. The method of claim 13 wherein processing the first image to produce a cytoplasm contrast mask includes applying a threshold to the

first image to create a binary mask having ON pixels in areas representing 3 the presence of features in that image. The method of claim 13 wherein combining the cytoplasm 1 contrast mask and the nuclear contrast mask comprises: 2 morphologically processing each mask to expand regions of 3 connected ON pixels, thereby producing processed masks; and logically ANDing the processed masks to produce an 5 intersection image that defines regions of overlap or near overlap of 6 features present in the images. 7 The method of claim 18, and further comprising: 1 morphologically processing the intersection image to expand 2 regions of connected ON pixels, thereby producing a seed image; and 3 reconstructing the seed image within the cytoplasm contrast 4 mask and the nuclear contrast mask to represent cytoplasm and nuclei for those objects that are likely to be fetal nucleated red blood cells. 6 20. A method of detecting fetal nucleated red blood cells in 1 a sample region that contains additional objects, the method comprising: 2 providing a sample stained with a first dye that 3 preferentially stains fetal cytoplasm and a second dye that preferentially 4 stains cell nuclei; 5 transilluminating the sample with first light in a wavelength 6 range that is absorbed by the first dye; 7 simultaneously illuminating the sample with second light that 8 causes the second dye to fluoresce and emit third light; 9 forming a forming a single image of the first light passing 10 through the sample and the third light emitted by the sample; 11 determining a background level for the single image; 12 generating a cytoplasm image by increasing pixel values in the 13 single image by a second amount so that background regions are generally 14 at maximum intensity; 15 thresholding the cytoplasm image to create a binary cytoplasm 16 contrast mask having regions having ON pixels representing the presence of 17 objects stained by the first dye; 18 generating a nuclear image by reducing pixel values in the 19 single image by a first amount so that background regions are generally at 20 minimum intensity; 21 thresholding the nuclear image to create a binary nuclear 22 contrast mask having regions having ON pixels representing the presence of 23 objects stained by the second dye; 24 morphologically processing each mask to expand regions of 25 connected ON pixels, thereby producing processed masks; 26 logically ANDing the processed masks to produce an 27

intersection image that defines regions of overlap or near overlap of

29	objects in the cytoplasm image stained by the first dye and objects in the
30	nuclear image stained by the second dye;
31	morphologically processing the intersection image to expand
32	regions of connected ON pixels, thereby producing a seed image; and
33	reconstructing the seed image within the cytoplasm contrast
34	mask and the nuclear contrast mask to represent cytoplasm and nuclei for
35	those objects that are likely to be fetal nucleated red blood cells.

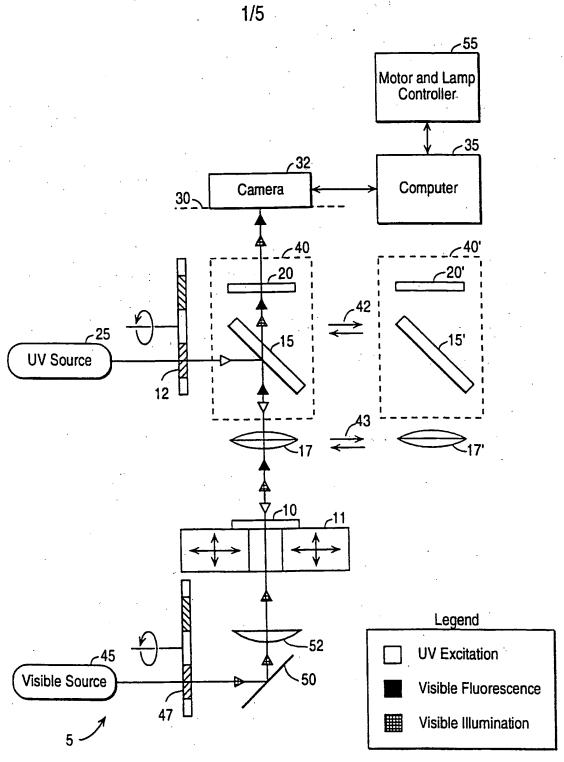


FIG. 1

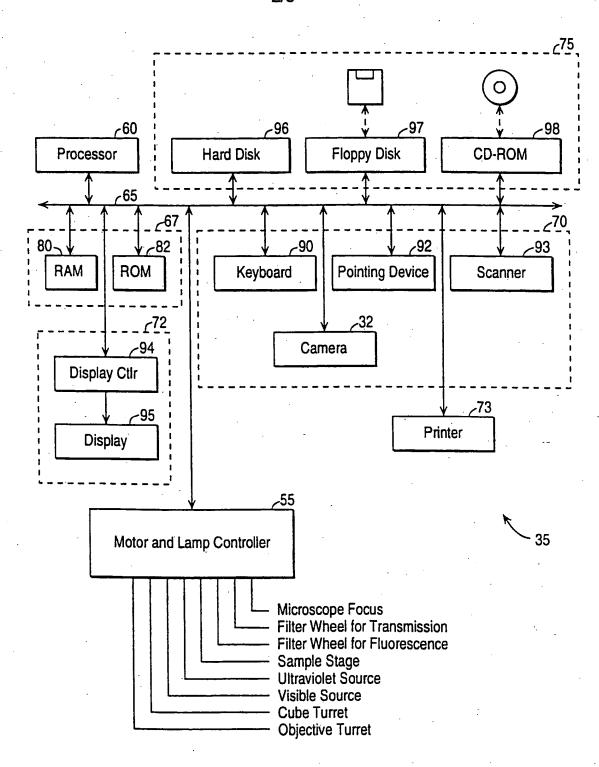


FIG. 2

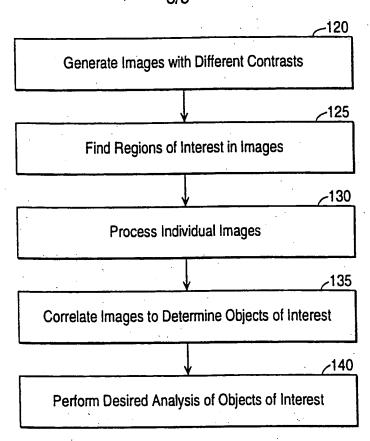


FIG. 3



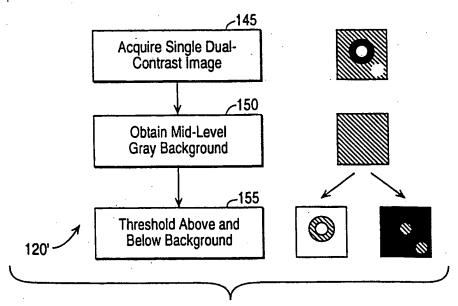


FIG. 4A

SUBSTITUTE SHEET (RULE 26)

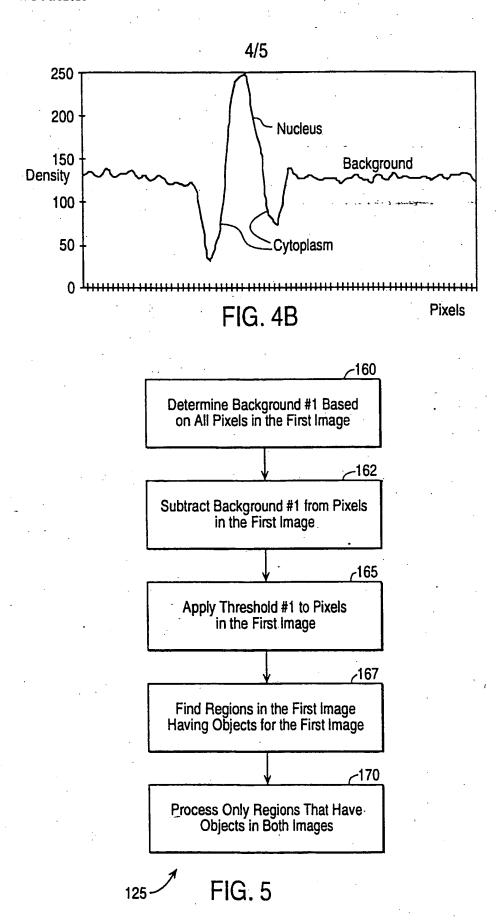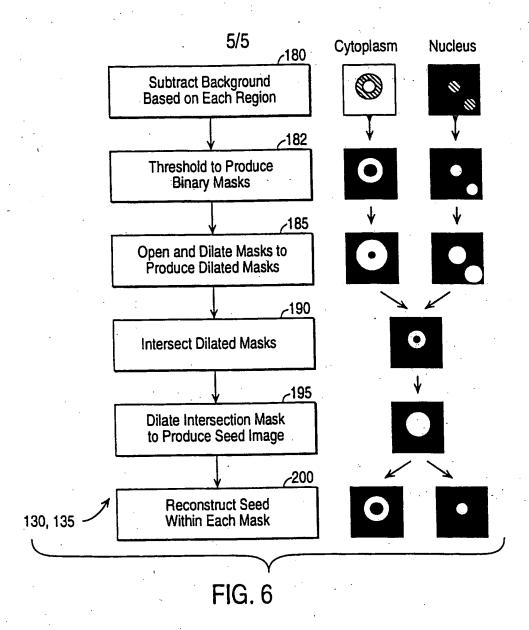

SUBSTITUTE SHEET (RULE 26)



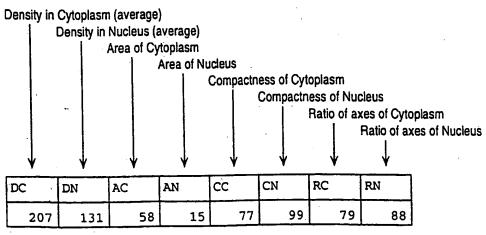


FIG. 7

INTERNATIONAL SEARCH REPORT

Irr utional Application No PCT/US 98/09689

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 G01N15/14		
According to International Patent Classification (IPC) or to both natio	onal classification and IPC	
B. FIELDS SEARCHED	· .	
Minimum documentation searched (classification system followed b ${\sf IPC}\ 6 \qquad {\sf GO1N}$	oy classification symbols)	·
Documentation searched other than minimum documentation to the	extent that such documents are included in the fields a	earched
	•	·
Electronic data base consulted during the international search (nam	ne of data base and, where practical, search terms use	od)
	<u>·</u>	
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category * Citation of document, with indication, where appropria	ate, of the relevant passages	Relevant to claim No.
X US 5 162 990 A (ODEYALE) 1 see abstract	10 November 1992	1,2,4
see column 5, line 15 - li see column 5, line 61 - co see column 11, line 50 - l	ine 49 Dlumn 6, line 38	16,20
y see column 11, line 50 - 1 see figures 2,3	ine 5/	8,13,14
Y US 5 294 799 A (ASLUND) 15 see column 2, line 39 - li	ine 57	8
see column 3, line 35 - co see figure 1	olumn 4, line 25	1,3,13, 15,20
	-/	
Further documents are listed in the continuation of box C.	X Patent family members are liste	ed in annex.
Special categories of cited documents:	"T" later document published after the in	nternational filing date
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international	or priority date and not in conflict w cited to understand the principle of invention	theory underlying the
filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another	"X" document of particular relevance; the cannot be considered novel or can involve an inventive step when the "Y" document of particular relevance; the content of particular relevance relevan	not be considered to document is taken alone
citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means	cannot be considered to involve an document is combined with one or ments, such combination being ob	n inventive step when the more other such docu-
"P" document published prior to the international filing date but later than the priority date claimed	in the art. "&" document member of the same pate	ent family
Date of the actual completion of theinternational search	Date of mailing of the international	search report
26 August 1998	03/09/1998	· · · · · · · · · · · · · · · · · · ·
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk	Authorized officer	
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Thomas, R.M.	

INTERNATIONAL SEARCH REPORT

In Itional Application No PCT/US 98/09689

	ion) DOCUMENTS CONSIDERED TO BE RELEVANT Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Category *	Citation of document, with indication, where appropriate, with the comment of the citation of	
Υ	WO 94 02830 A (INSTITUTE OF CANCER RESEARCH) 3 February 1994 see abstract see page 7, line 7 - line 10 see page 13, line 28 - line 33	8,13,14
Α -	see page 15, line 29 - page 16, line 11	20
x	US 5 093 866 A (DOUGLAS-HAMILTON) 3 March 1992	1,2
	see column 2, line 48 - column 3, line 2 see column 3, line 23 - line 37 see column 3, line 48 - line 56 see column 5, paragraph 1	
Α	see column 5, line 56 - line 65 see column 8, line 46 - line 47; figure 1	13,14,20
X	EP 0 732 582 A (BIO-RAD) 15 January 1997 see column 1, paragraph 2	1,2
	see column 5, line 1 - line 56 see column 9, line 38 - line 39 see column 11, line 7 - line 23 see column 14, line 23 - column 15, line 2 see column 15, line 6 - line 8	
Á	see column 15, line 6 - line 8 see figures 1,20	8,13,20
A	WO 97 05562 A (NEOPATH) 13 February 1997 see page 1, paragraph 1 see page 7, line 27 - page 10, line 22	4-20
	see figures 2-5	
P,X	WO 97 26617 A (ONCOR) 24 July 1997	8,10,13, 15
	see page 3, line 9 - line 26 see page 4, line 16 - line 26 see page 5, line 1 - line 5	
A '	see page 9, line 15 - page 11, line 2 see figure 1	9,11, 16-19
	eas and with view year	*

1

INTERNATIONAL SEARCH REPORT

information on patent family members

Int tional Application No PCT/US 98/09689

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US/5162990	A	10-11-1992	NONE	
u\$ 5294799	Α .	15-03-1994	AT 152519 T DE 69402958 D DE 69402958 T EP 0681695 A WO 9418547 A JP 8506419 T US 5418371 A	15-05-1997 05-06-1997 11-12-1997 15-11-1995 18-08-1994 09-07-1996 23-05-1995
WO 9402830	Α ·	03-02-1994	NONE	· .
US 5093866	Α	03-03-1992	NONE	
EP 0732582	A	18-09-1996	US 5591981 A CA 2171588 A JP 9015171 A US 5784152 A	07-01-1997 17-09-1996 17-01-1997 21-07-1998
WO 9705562	Α	13-02-1997	US 5642433 A AU 6595496 A	24-06-1997 26-02-1997
WO 9726617	, A	24-07-1997	US 5764792 A AU 1749297 A	09-06-1998 11-08-1997